



Product news
Roxtec ComLite



Roxtec ComLite cable entry seal
– simpler, smarter, better

New compression for easier installations
Sealing kits with few parts


We Seal Your World

Hard Work? – Not with ComLite!

Roxtec is proud to present the new Roxtec ComLite cable entry seal, which combines extraordinary flexibility with simple handling and true cost efficiency.

The ComLite solution is a light-weight cable entry seal comprised of a compact composite frame and sealing modules with capacity for several different cable diameters. It is well suited for bolting or riveting onto most constructions and provides excellent protection against water, dust, insects and rodents.

The new Roxtec ComLite lifts cable seals to a new and lighter level!

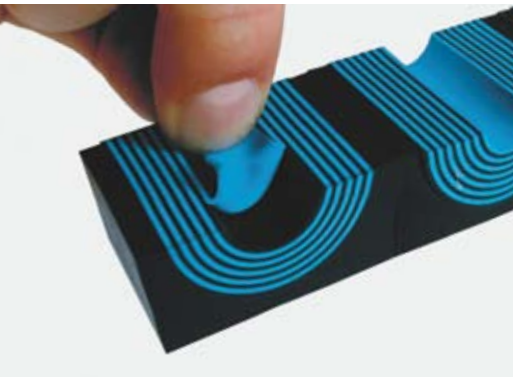

Multidiameter™

Roxtec is an organization dedicated to smart solutions, efficient use of technology and continuous development. Multidiameter™, the Roxtec technology based on modules with removable layers, is an original Roxtec innovation. The system creates an intrusion proof cable entry by using adaptable sealing modules together with a frame and mechanical compression. One single Roxtec module can

be used to seal cables of several different sizes, simply by peeling off layers from the module halves until a perfect fit is achieved.

Simpler



Few parts mean simple installation. The new integrated quick-lock compression method is the easiest mechanical compression on the market.

Smarter

The ComLite is delivered as a complete kit-solution which guarantees simple ordering and handling, and accuracy in delivery. The seal is pre-installed preventing faulty and incomplete installations. One ComLite kit can fit countless different cable combinations, it will last through an entire project, and beyond.



Roxtec ComLite – technical specifications

Frame


Weight, incl. knock-out plate (kg)	0.7
Packing space (mm) (W x H)	120x180
Frame material:	PA 6.6 30% glassfibre
Compression unit:	PA 6 30% glassfibre+ TPE
Gasket material:	Roxylon
Compression plate:	PP 30% glassfibre + TPE

■ ComLite is certified according to IEC 60529 to IP 54.

Roxtec CML modules

Module type	For cable/pipe diameter (mm)	External dim. (mm) (H x W x D)
CML 20w40	2x0+4-14.5	20x40x30
CML 30	0+10-25	30x30x30
CML 40 10-32	0+9.5-32.5	40x40x30

■ The adaptable Roxtec modules are made of Roxylon rubber.

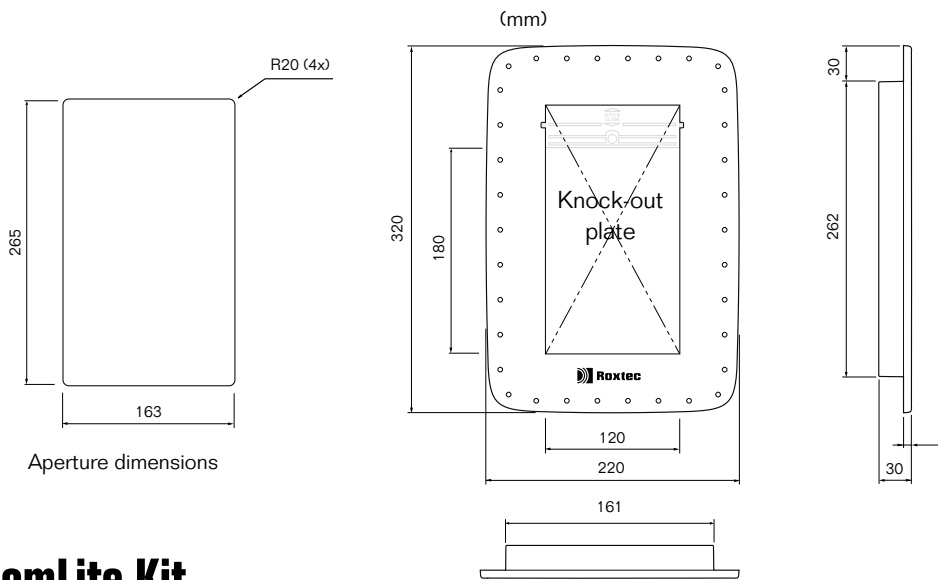


ComLite Kit

KIT	Module typ			Stayplate	Frame
	CML 20W40	CML 30	CML 40 10-32		
Comlite 6/18	3 pcs		12 pcs	4 pcs	1 psc
Comlite 6/26	6 psc	8 psc	6 psc	5 pcs	1 pcs
Comlite 6/24		24 psc		5 pcs	1 pcs

■ The Kit includes lubricant

■ Stayplate are made of galvanised steel.

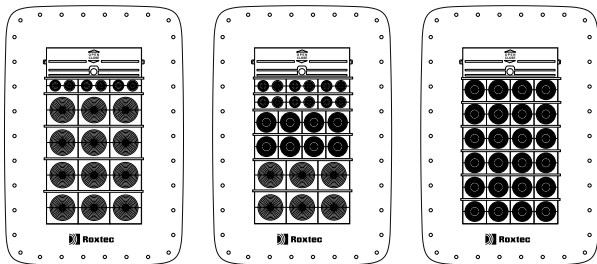

ComLite 6/18

ComLite 6/26

ComLite 6/24



Roxtec International AB
 Box 540, 371 23 Karlskrona, SWEDEN
 PHONE +46 455 36 67 00, FAX +46 455 820 12
 EMAIL info@se.roxtec.com, www.roxtec.com